

Commonwealth Energy Biogas/PV Mini-Grid  
Renewable Resources Program

***Making Renewables Part of an Affordable and  
Diverse Electric System in California***

**Contract No. 500-00-036**

**Monthly Data Report for August 2005 (Draft)**

Project 3.1 Co-Digestion of Dairy Manure/Food Processing  
Wastes and Biosolids /Food Processing Wastes to Energy

*Task 3.1.5 Operate and Test Pilot (Demonstration) Plant(s)*

**Prepared For:**  
California Energy Commission  
Public Interest Energy Research Renewables Program

**Prepared By:**

**CH2MHILL**

Bill Kitto, CH2M HILL, Santa Ana, California  
3 Hutton Centre Drive, Suite 200  
Santa Ana, CA 92707

**March 2006**

**LEGAL NOTICE**

This report was prepared as a result of work sponsored by the California Energy Commission (Energy Commission). It does not necessarily represent the views of the Energy Commission, its employees, or the State of California. The Energy Commission, the State of California, its employees, contractors, and subcontractors, make no warranty, express or implied, and assume no legal liability for the information in this report; nor does any party represent that the use of this information will not infringe upon privately owned rights. This report has not been approved or disapproved by the Energy Commission, nor has the Energy Commission passed upon the accuracy or adequacy of the information in this report.



**Printed on  
Recycled and  
Recyclable  
Paper**

# Contents

---

Section	Page
<b>Acronyms and Abbreviations .....</b>	<b>vii</b>
<b>1 Introduction .....</b>	<b>1-1</b>
<b>2 Co-Digestion Performance Summary .....</b>	<b>2-1</b>
2.1 Co-Digestion Inputs .....	2-1
2.2 Digester Performance Data .....	2-2
2.3 Cost Data.....	2-3
2.3.1 Installation Costs .....	2-3
2.3.2 Operations and Maintenance Costs .....	2-3
<b>3 Food Waste Received for Manure and Biosolids Co-Digestion Test .....</b>	<b>3-1</b>
<b>4 Manure and Food Waste Co-Digestion.....</b>	<b>4-1</b>
4.1 Manure and Food Waste Co-Digestion Operations with Digester 4 at RP-1 .....	4-1
4.1.1 Manure Digestion at RP-1 .....	4-1
4.1.2 Food Waste and Dairy Manure Co-Digestion at Digester 4 .....	4-1
4.1.3 Co-digestion Facility at RP-1.....	4-1
4.2 Digester 4 Operational Parameters .....	4-2
4.2.1 Feed Manure and Food Waste .....	4-2
4.2.2 Solids Loading Rate (SLR).....	4-4
4.2.3 Hydraulic Retention Time (HRT).....	4-5
4.3 Digester 4 Performance.....	4-5
4.3.1 Digester 4 pH .....	4-6
4.3.2 Digester 4 IA/PA.....	4-6
4.3.3 Digester 4 Temperature .....	4-6
4.3.4 Digester 4 Biogas Production.....	4-7
4.3.5 VSR .....	4-7
4.3.6 Biogas Yield .....	4-8
4.4 Monthly Operation and Performance Summary .....	4-9
<b>5 Biosolids and Food Waste Co-Digestion .....</b>	<b>5-1</b>
5.1 Existing Biosolids Processing Trains at RP-1.....	5-1
5.2 Biosolids and Food Waste Co-Digestion at RP-1 .....	5-2
5.3 Digesters 2 and 6 Operational Parameters.....	5-2
5.3.1 Feed Biosolids and Food Waste.....	5-2
5.3.2 Solids Loading Rate (SLR).....	5-2
5.3.3 Hydraulic Retention Time (HRT).....	5-2
5.4 Digesters 2 and 6 Performance .....	5-2
5.4.1 Digester pH .....	5-2
5.4.2 Digester IA/PA.....	5-2

Section	Page
5.4.3	Digester Temperature..... 5-7
5.4.4	Biogas Production ..... 5-7
5.4.5	VSR..... 5-8
5.4.6	Biogas Yield..... 5-8
5.5	Monthly Operation and Performance Summary ..... 5-9

### Tables

2-1	Inputs to Co-Digestion Systems for Dairy Manure, Biosolids, and Food Waste..... 2-1
2-2	Digester Performance ..... 2-2
2-3	Co-Digestion and Iron Sponge Project Installation Costs ..... 2-3
4-1	Digester 4 Monthly Average Data for Feed and Feed Characterization for August 2005 ..... 4-4
4-2	Monthly Digester 4 Data Averages for August 2005 ..... 4-9
4-3	Monthly Averages of Dewatering and Recycle Streams Data for Manure at Digester 4 for August 2005 ..... 4-11
5-1	Monthly Averages of Digesters 2 and 6 Feed Characteristics for August 2005 .5- <b>Error! Bookmark not defined.</b>
5-2	Monthly Averages of Digesters 2 and 6 Operational and Performance Data for August 2005 ..... 5-9
5-3	Monthly Averages of Dewatering and Recycle Streams Data for Digesters 2 and 6 for August 2005 ..... 5-10

### Figures

3-1	Combined Food Waste Flow Delivered for Co-Digestion Test During August 2005 ..... 3-1
3-2	TS Concentration and VS Content of the Food Waste Delivered by Type ..... 3-2
4-1	Manure and Food Waste Co-Digestion Facility at RP-1..... 4-2
4-2	Digester 4 Manure and Food Waste Daily Flow ..... 4-3
4-3	TS Concentrations and VS Content of the Manure Fed to Digester 4 ..... 4-3
4-4	Digester 4 Volatile Solids Loading Rate (Manure and Food Waste Combined)..... 4-5
4-5	Digester 4 Hydraulic Retention Time ..... 4-5
4-6	Digester 4 pH..... 4-6
4-7	Digester 4 IA/PA ..... 4-6
4-8	Digester 4 Temperature..... 4-7
4-9	Digester 4 Gas Production ..... 4-7
4-10	Digester 4 VS Reduction ..... 4-8
4-11	Digester 4 Biogas Yield..... 4-8
5-1	RP-1 Current Biosolids Digester Configuration ..... 5-1
5-2	Biosolids and Food Waste Flow to Digesters 2 and 6 ..... 5-3
5-3	TS Concentration and VS Content of Digesters 2 and 6 Feed Sludge (Digester 1 Effluent)..... 5-4
5-4	Digesters 2 and 6 Volatile Solids Loading Rate ..... 5-5

	<b>Page</b>
5-5	Digesters 2 and 6 Hydraulic Retention Times.....5-5
5-6	Digester pH .....5-6
5-7	Digester IA/PA.....5-6
5-8	Digester Temperature .....5-7
5-9	Digester Gas Production.....5-7
5-10	VS Reduction.....5-8
5-11	Biogas Yield.....5-8



# Acronyms and Abbreviations

---

AFT	Applied Filter Technology
AMD	acid manure digester
BFP	belt filter press
Btu/cf	British thermal units per cubic foot
cf/d	cubic feet per day
cf/hr	cubic feet per hour
cf/lb	cubic feet per pound
cfm	cubic feet per minute
CO <sub>2</sub>	carbon dioxide
DAF	dissolved air flotation
DAFT	dissolved air flotation thickener
dtpd	dry ton per day
FID	flame ionization detector
FS	fixed solids
g/cm <sup>3</sup>	gram per centimeter cubed
gpm	gallon per minute
H <sub>2</sub> S	hydrogen sulfide
HRT	hydraulic retention time
IA/PA	volatile acids (VA): Alkalinity ratio (expressed as "IA/PA" in IEUA analytical protocols)
IEUA	Inland Empire Utilities Agency
K cf/d	1,000 cubic feet per day
K cf/hr	1,000 cubic feet per hour
K gal/d	1,000 gallons per day
K gpd	1,000 gallons per day
K lb/d	1,000 pounds per day
lb/d	pound per day
lb/gal	pound per gallon
µg/L	micrograms per liter
MG	million gallon
mgd	million gallon per day
mg/L	milligram per liter

NRW	non-reclaimable waste
PIER	Public Interest Energy Research
ppm	part per million
ppmv	part per million by volume, dry
PS	primary sludge
psig	pound per square inch gauge
SiO <sub>2</sub>	silicone dioxide
SLR	solids loading rate
SWD	side water depth
TDS	total dissolved solid
TKN	total Kjeldahl nitrogen
TPS	thickened primary sludge
TS	total solids
TSS	total suspended solid
TWAS	thickened waste activated sludge
VA	volatile acids
VS	volatile solids
VSR	volatile solids reduction
WAS	waste activated sludge
wtpd	wet ton per day

## SECTION 1

# Introduction

---

In late August 2005, the California Energy Commission (Energy Commission) authorized the contractor to proceed with Project 3.1 – Co-Digestion of Dairy Manure/Food Processing Wastes and Biosolids/Food Processing Wastes to Energy. The goals of this project are to:

- Develop technologies that will address the lack of knowledge of the relationship between various co-digestion feedstocks and gas production. Pilot (demonstration) scale systems will be developed to yield information on the direct relationship between the physical and chemical characteristics of the feedstocks and the operating parameters of the co-digestion system and the increase in gas production associated with their co-digestion.
- Provide information for future users on the development of optimal blends or “cocktails” for co-digestion projects.
- Quantify the potential environmental benefits of dairy waste to energy projects in such a way that their values can be identified as individual projects are being implemented.
- Report the results of studies that led to the establishment of the foregoing goals.

Task 3.1.5 in Project 3.1 calls for (1) operating the plant and conducting co-digestion tests in accordance with the test plan, and (2) preparing monthly plant operating data reports to verify that the pilot (demonstration) plant meets performance requirements (e.g., throughput, environmental requirements, waste processing, and gas production/energy recovery).

Pilot tests for co-digestion of both dairy manure/food processing wastes and biosolids/food processing wastes to energy have been conducted at the Inland Empire Utilities Agency (IEUA) Regional Plant No. 1 (RP-1) since April 2005. This report presents the plant operational and performance data obtained during the month of August 2005.



## SECTION 2

# Co-Digestion Performance Summary

## 2.1 Co-Digestion Inputs

Table 2-1 shows inputs to the co-digestion systems for dairy manure, biosolids and food waste. For the biosolids test, flows into Digester 1 are shown, with the effluent amounts (flow, total solids [TS] and volatile solids [VS]) apportioned to digesters 2, 6, and 7.

TABLE 2-1  
Inputs to Co-Digestion Systems for Dairy Manure, Biosolids, and Food Waste

Inputs	Flow (GPD)	TS (Lbs/Day)	VS (Lbs/Day)	Avg. % Solids (%TS)
<b>1) Co-digestion of dairy manure/food processing wastes</b>				
<b>Digester 4</b>				
Dairy manure	39,090	48,309	38,109	14.8%
Food processing wastes				
Salad Dressing	606	562	467	11.1%
Lactose	337	200	149	7.1%
Ice Cream	515	976	961	22.7%
<b>Total<sup>2</sup></b>	<b>40,550</b>	<b>50,050</b>	<b>39,690</b>	<b>14.8%</b>
<b>2) Co-digestion of biosolids/ food processing wastes</b>				
<b>Digester 1</b>				
Biosolids	273,763	102,689	79,895	4.5%
Food processing wastes <sup>1</sup>				
Salad Dressing	0	0	0	N/A
Lactose	0	0	0	N/A
Ice Cream	2,617	2,648	2,538	12.1%
<b>Total<sup>2</sup></b>	<b>276,380</b>	<b>105,340</b>	<b>82,430</b>	<b>4.6%</b>
<b>Distribution of Digester 1 Effluent: Feed to Digesters 2, 6, and 7:</b>				
Digester 2	73,702 <sup>1</sup>	22,966	17,488	3.7%
Digester 6, 7	101,339 <sup>1</sup>	31,577	24,043	3.7%

<sup>1</sup> Food waste was added to Digester 1 from DAFT3. The flow here is the proportioned amount based on the flow distribution ratio from Digester 1 to digesters 2, 6, and 7. Average number includes zeros.

<sup>2</sup> Totals rounded to the nearest 10.

NA = Not Available or Not Applicable.

## 2.2 Digester Performance Data

Table 2-2 shows performance parameters for Digester 4 (manure co-digestion) and digesters 1, 2, 6, and 7 (biosolids co-digestion).

TABLE 2-2  
Digester Performance

<b>1) Co-digestion of dairy manure/food processing wastes</b>		<b>Units</b>	<b>Digester 4</b>			
VS loading rate		lbVS/cf active volume <sup>1</sup>	0.359			
Hydraulic Retention Time		Days	25			
Digester Temperature		°F	99			
pH changes over time		pH (range)	7.4 - 7.65			
Iron Salt Addition		gpd	185			
Volatile Solids (VS) Reduction		%	50.5%			
Gas Yield <sup>2</sup>		cf/lb VSR	5.8			
CH <sub>4</sub> in Biogas		%	54%			
CO <sub>2</sub> in Biogas		%	35%			
H <sub>2</sub> S in Biogas		ppm	60			
<b>2) Co-digestion of biosolids/food processing wastes</b>			<b>Digester 1</b>	<b>Digester 2</b>	<b>Digester 6</b>	<b>Digester 7</b>
VS loading rate		lbVS/cf active volume <sup>1</sup>	0.672	0.143	0.107	0.107
Hydraulic Retention Time		Days	2.7	12	16	16
Digester Temperature		°F	101	127	100	119
pH changes over time		pH (range)	5.1 – 7.4	7.4 – 8.0	7.3 – 7.6	7.4 – 7.8
Volatile Solids (VS) Reduction		%	38%	43%	43%	45%
Biogas Yield <sup>2</sup>		cf/lb VSR	4.1	46.8	23	22.5
CH <sub>4</sub> in Biogas		%	N/A	63	63	N/A
CO <sub>2</sub> in Biogas		%	N/A	36	36	N/A
H <sub>2</sub> S in Biogas <sup>3</sup>		ppm	74	N/A	N/A	N/A

<sup>1</sup> Digester's active volume was calculated based on digester SWD (30 feet) and with cone volume.

<sup>2</sup> Gas Yield/Biogas Yield based on 15-day running averages for VS in, VS out, and Gas Production. This would be a different value if a different running average period was used.

<sup>3</sup> H<sub>2</sub>S was not measured specifically for digesters 2, 6, or 7. H<sub>2</sub>S in gas from these digesters was measured at the waste gas burner, where it averaged 48 ppm, and at the common feed to the recovery boiler (after iron sponge treatment, where it averaged 8 ppm).

NA = Not Available or Not Applicable.

The focus of the monthly reporting was on digesters 2 and 6. Detailed graphical data showing trends for the above parameters for digesters 2 and 6 are shown in the body of this report.

## 2.3 Cost Data

### 2.3.1 Installation Costs

Total installation costs for the co-digestion equipment at RP-1 used to conduct the field tests are shown in Table 2-3. Costs to install iron sponge modifications, which were indirectly related to the co-digestion project, are shown as well.

TABLE 2-3  
Co-Digestion and Iron Sponge Project Installation Costs

	Co-Digestion	Iron Sponge Modifications	Total	Comments
Raw Materials	\$ 562,000	\$ 14,000	\$ 576,000	Includes food-waste tanks, pumps, media for iron sponge
Total installation subcontracts	\$ 226,000	\$ 158,000	\$ 384,000	
Host site (IEUA) General & Administrative	\$ 79,000	\$ 17,000	\$ 96,000	10% of (Raw Materials + Installation costs)
CH2M HILL cost (design and engineering)	\$ 85,000	\$ 31,000	\$ 116,000	
<b>TOTAL</b>	<b>\$ 952,000</b>	<b>\$ 220,000</b>	<b>\$1,172,000</b>	

NOTE: All costs rounded to nearest \$1,000.

These costs are one-time costs to the project, and will be recorded again for reference only in subsequent monthly data reports for Task 3.1.5.

In addition, IEUA spent approximately \$1.3 million on safety and performance upgrades to the existing gas handling system. These changes had already been identified before the project started. However, the addition of co-digestion increased the urgency of this project. For estimating purposes, approximately one-third of this cost, or about \$433,000, could be necessary in addition to the direct costs of the co-digestion project shown in Table 2-3. It is anticipated that similar expenditures could be needed at other facilities in California where co-digestion projects are installed.

### 2.3.2 Operations and Maintenance Costs

For the month of August 2005, total operations and maintenance costs were estimated at \$27,200, broken out as follows:

- \$ 1,500 host site (IEUA) labor and administrative costs
- \$14,300 subcontracted operators and lab costs
- \$11,400 costs from CH2M HILL

These costs include laboratory testing costs as well as standard operating costs. For a full-scale system, the laboratory tests and most of the CH2M HILL costs for testing and analysis would not be included.

SECTION 3

# Food Waste Received for Manure and Biosolids Co-Digestion Test

This section provides a summary of the food waste delivered to the RP-1 plant during the month of August 2005. The food waste delivered was used for manure and biosolids co-digestion tests and included salad dressing waste from GFF, Inc. (normally delivered on Wednesdays), lactose waste from AJ Juice, and ice cream waste from Alta Dena, delivered over the week.

Figure 3-1 shows the combined food waste flow that has been fed to the manure (Digester 4) and biosolids train for co-digestion tests.

Figure 3-2 shows the TS concentration and VS content of the TS of the food waste, by type, that has been fed to the manure (Digester 4) and biosolids train for co-digestion tests.

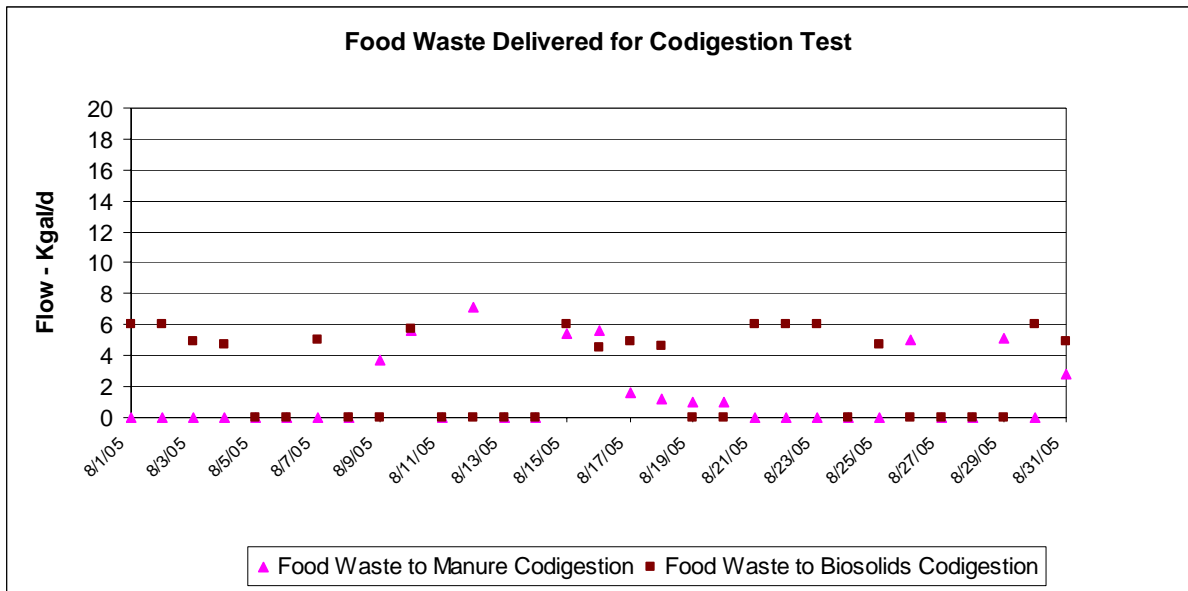


FIGURE 3-1  
Combined Food Waste Flow Delivered for Co-Digestion Test During August 2005

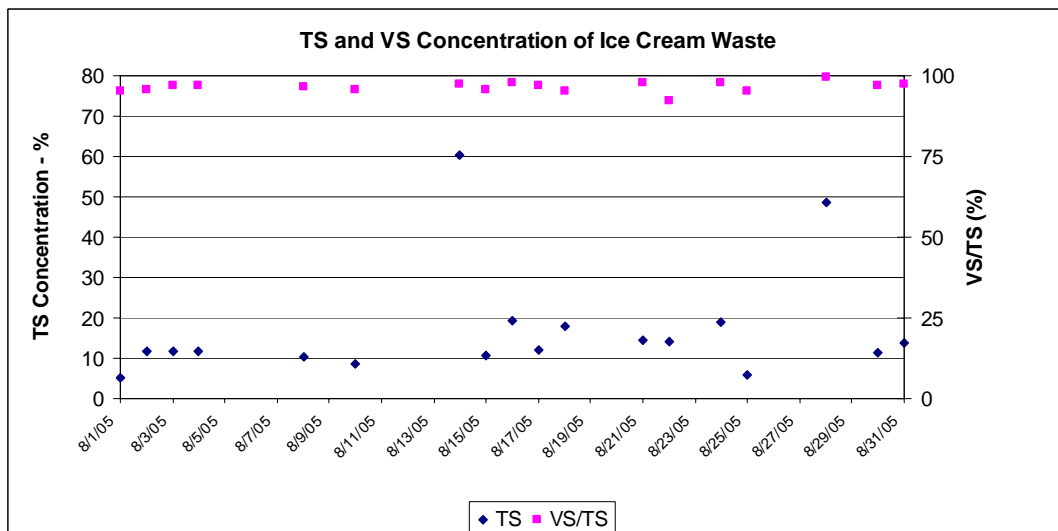
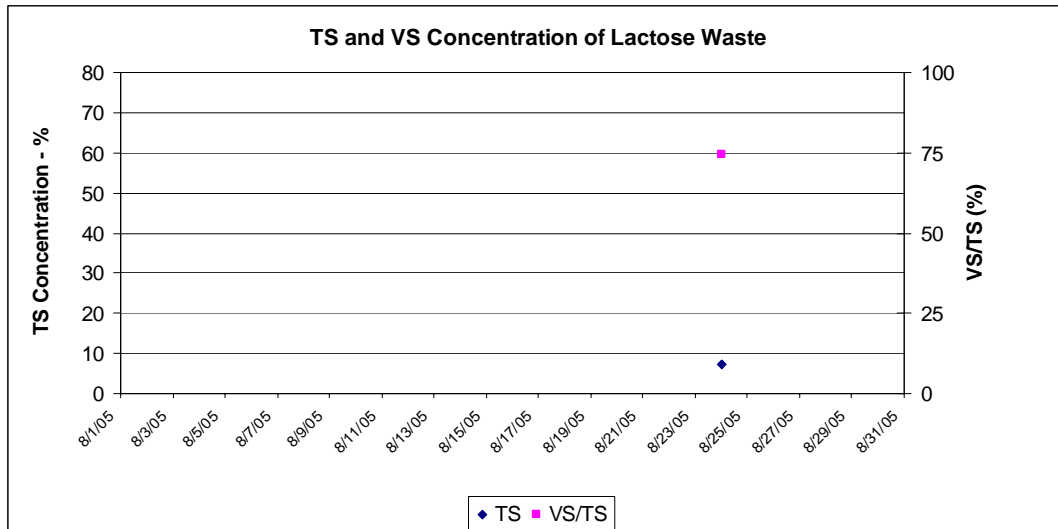
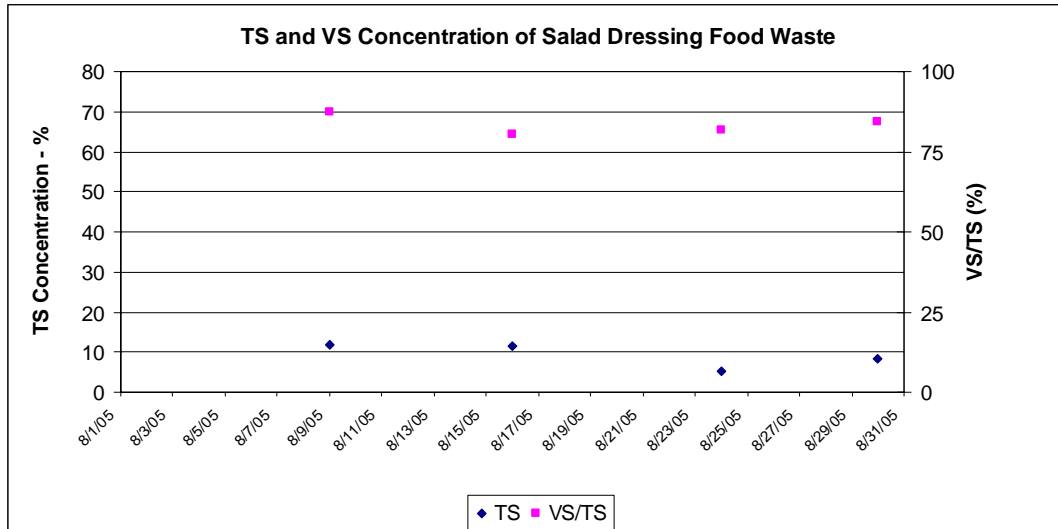


FIGURE 3-2  
TS Concentration and VS Content of the Food Waste Delivered by Type

## SECTION 4

# Manure and Food Waste Co-Digestion

---

This section provides operational and performance data obtained from manure and food waste co-digestion tests during the month of August 2005.

## 4.1 Manure and Food Waste Co-Digestion Operations with Digester 4 at RP-1

### 4.1.1 Manure Digestion at RP-1

In 2002, IEUA retrofitted an existing digester (Digester 4) located within the Agency RP-1 facility to accept dairy manure. RP-1 currently serves a cluster of seven dairies within 5 miles, which makes it an ideal location for a centralized dairy manure digestion facility. Manure is collected daily from the dairies' feed lanes by means of a vacuum tanker truck called the "honey-vac" and is transported daily to the RP-1 digester in a nurse tanker. The vacuum nurse tanker has a holding capacity of 5,500 gallons, and roams from dairy to dairy picking up manure slurry that has been temporarily stored in a holding tank and delivers it to the manure digestion facility at RP-1. These units provide efficient, clean transportation of manure from the dairies to the manure digester at RP-1. Under normal operations, the plant receives five to seven loads per day of dairy manure. Before July 2005, the trucked manure was fed to an acid manure digester (AMD) first; from there, it was fed to Digester 4. Since July, the trucked manure has been fed directly to Digester 4.

### 4.1.2 Food Waste and Dairy Manure Co-Digestion at Digester 4

Beginning in early April 2005, the RP-1 plant initiated a co-digestion project by adding food waste to the dairy manure fed to Digester 4. The food wastes are trucked to the plant on a daily basis, stored temporarily in the four food waste storage tanks, and fed to the manure digester and biosolids digestion trains from there. Prior to the full-scale pilot project, bench-scale testing of manure and food waste co-digestion was conducted at mesophilic and thermophilic conditions. Bench-scale testing showed that the microbial population in the digester can be stressed much more easily and rapidly at thermophilic temperatures; therefore, the full-scale testing of manure and food waste was conducted at mesophilic temperatures.

### 4.1.3 Co-Digestion Facility at RP-1

Figure 4-1 shows the manure and food waste co-digestion facility at RP-1.



FIGURE 4-1  
Manure and Food Waste Co-Digestion Facility at RP-1

## 4.2 Digester 4 Operational Parameters

Because digester operational parameters affect digester performance, it is necessary to monitor these parameters in relation to digester performance. For this full-scale test, digester operational parameters that are monitored include feed characteristics (e.g., flow and solids concentrations of the dairy manure and food waste), VS loading rate, hydraulic retention time, pH, alkalinity, and digester operational temperatures. Figures 4-2 to 4-5 present the digester feed flow and solids concentrations, VS loading rate, and hydraulic retention time. Monthly averages for operational parameters are discussed in Section 4.4.

### 4.2.1 Feed Manure and Food Waste

Figure 4-2 shows the manure and food waste flow added to Digester 4 during the month of August 2005. The food waste flow is the combined amount of the salad dressing, lactose, and ice cream wastes received in the plant and fed to the manure digester the same day.

Figure 4-3 presents the TS concentration and VS content of the manure that has been fed to Digester 4.

Table 4-1 presents Digester 4 monthly average data for feed and feed characterization for August 2005.

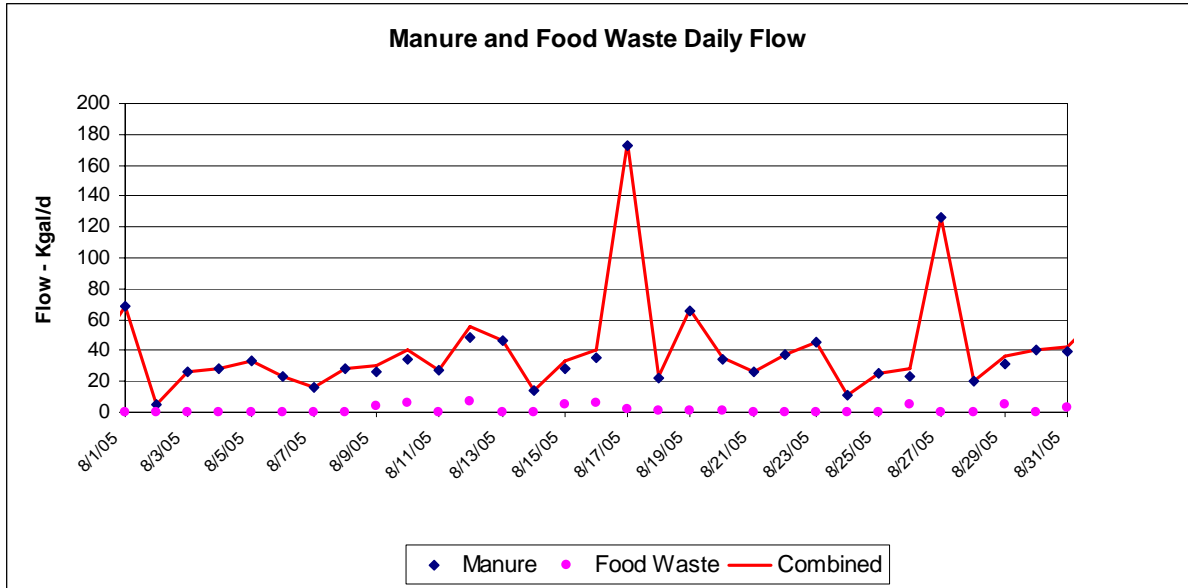


FIGURE 4-2  
Digester 4 Manure and Food Waste Daily Flow

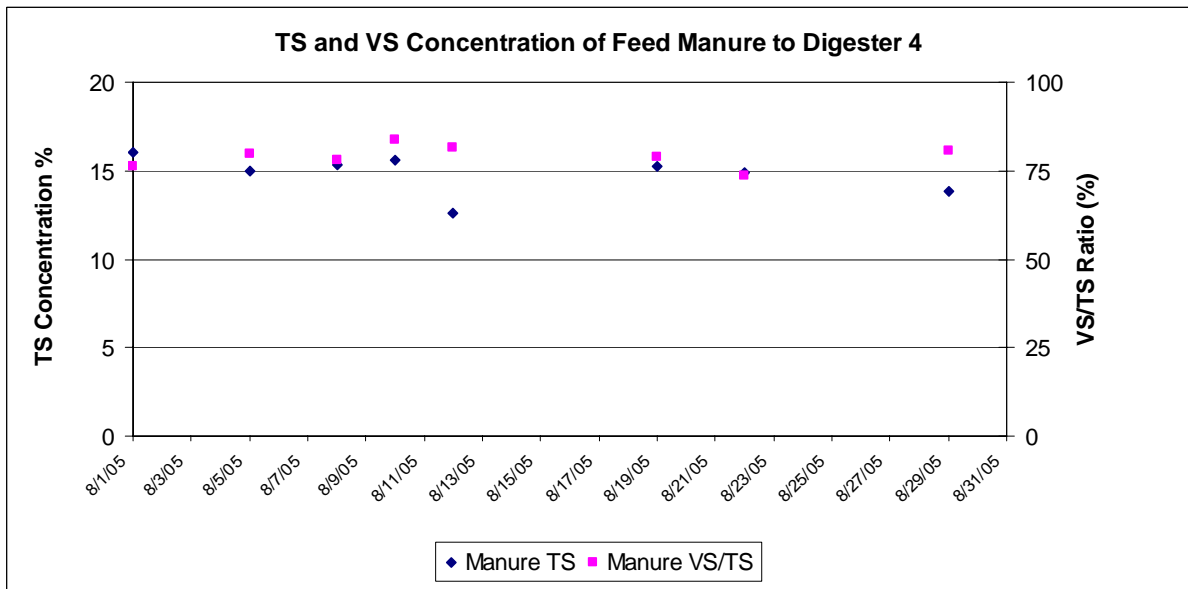


FIGURE 4-3  
TS Concentrations and VS Content of the Manure Fed to Digester 4

**TABLE 4-1**  
Digester 4 Monthly Average Data for Feed and Feed Characterization for August 2005

Parameter	Units	Manure Feed	Food Waste		
			Salad Dressing	Lactose	Ice Cream
Flow <sup>1</sup>	gpd	39,090	610	340	520
TS	%	15	11 <sup>2</sup>	7 <sup>2</sup>	23 <sup>2</sup>
VS	% of TS	79	83 <sup>2</sup>	75 <sup>2</sup>	98 <sup>2</sup>
pH		NA	NA	NA	NA
Alkalinity	mg/L	NA	NA	NA	NA
Temperature	<sup>o</sup> F	NA	NA	NA	NA
Volatile Acids	mg/L	NA	NA	NA	NA
Total Organic Carbon	mg/L	NA	NA	NA	NA
COD, mg/L	mg/L	NA	NA	NA	NA
NH <sub>4</sub> -N	mg/L	NA	NA	NA	NA
TKN	mg/L	NA	NA	NA	NA
Proximate Analysis		NA	NA	NA	NA

Notes:

<sup>1</sup> Average flow includes zero values. Numbers were rounded to the nearest 10.

<sup>2</sup> Missing values were filled with previous or adjacent days' test results.

NA = Not Applicable or Not Available.

## 4.2.2 Solids Loading Rate (SLR)

Figure 4-4 shows the VS loading rate for Digester 4 during the month of August.

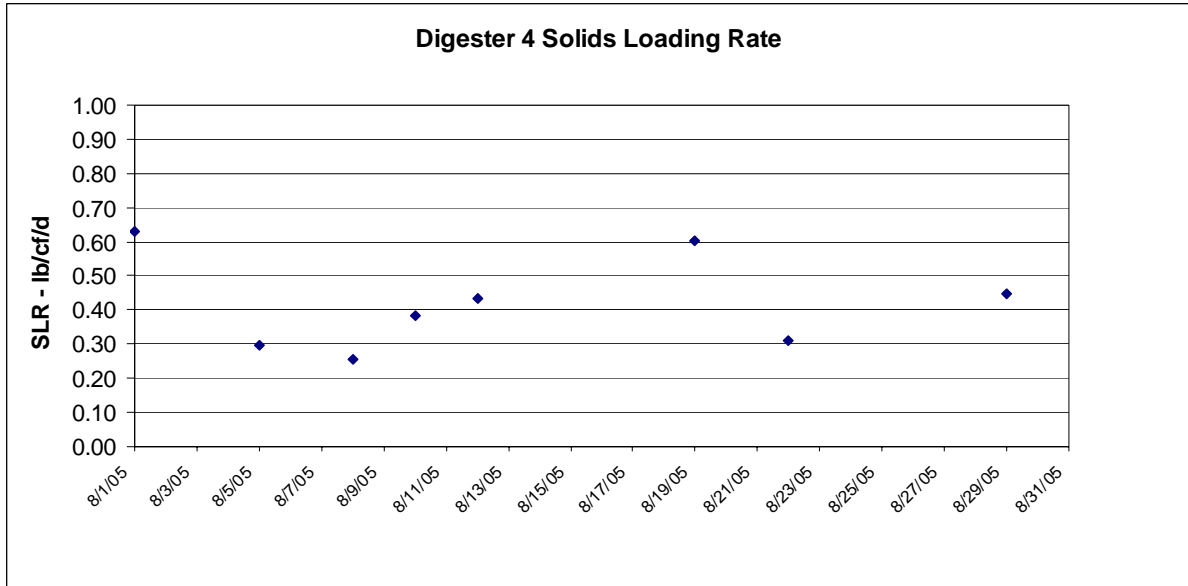


FIGURE 4-4  
Digester 4 Volatile Solids Loading Rate (Manure and Food Waste Combined)

### 4.2.3 Hydraulic Retention Time (HRT)

Figure 4-5 shows the hydraulic retention time in Digester 4.

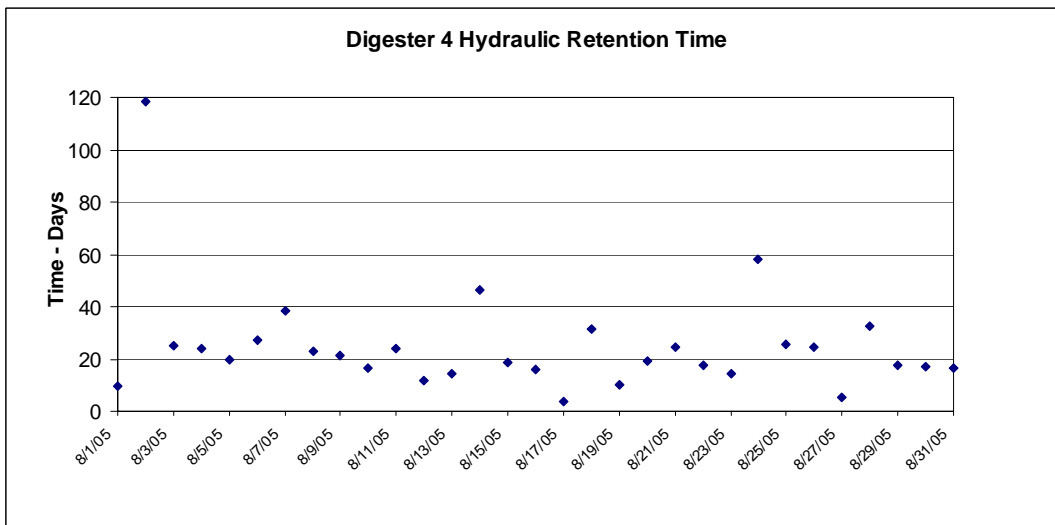


FIGURE 4-5  
Digester 4 Hydraulic Retention Time

## 4.3 Digester 4 Performance

The digester stability indication parameters of pH and IA/PA, and the digester performance parameters of biogas production, VSR, and biogas yield are presented in Figures 4-6 through 4-10.

### 4.3.1 Digester 4 pH

Figure 4-6 shows Digester 4 pH during the month of August 2005.

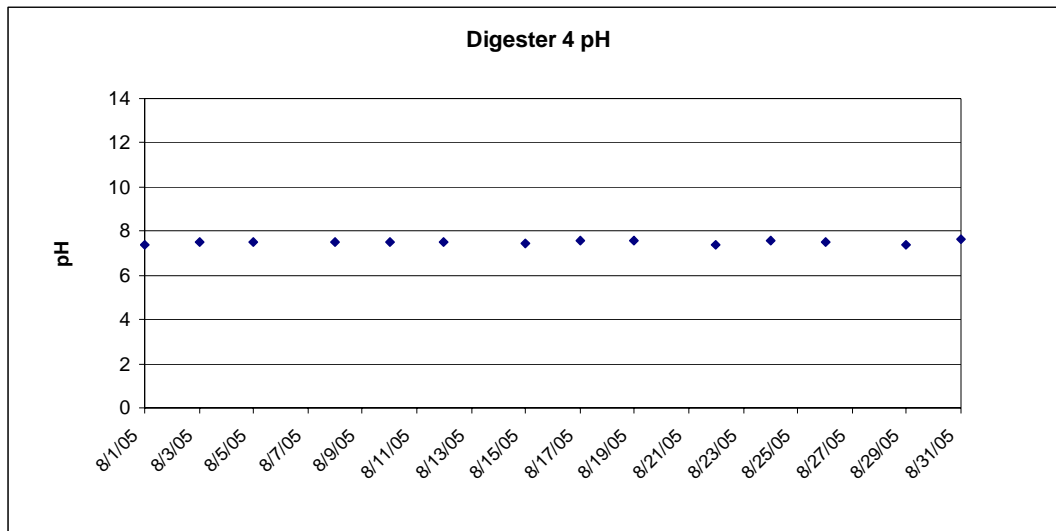


FIGURE 4-6  
Digester 4 pH

### 4.3.2 Digester 4 IA/PA

Figure 4-7 shows Digester 4 IA/PA during the month of August 2005.

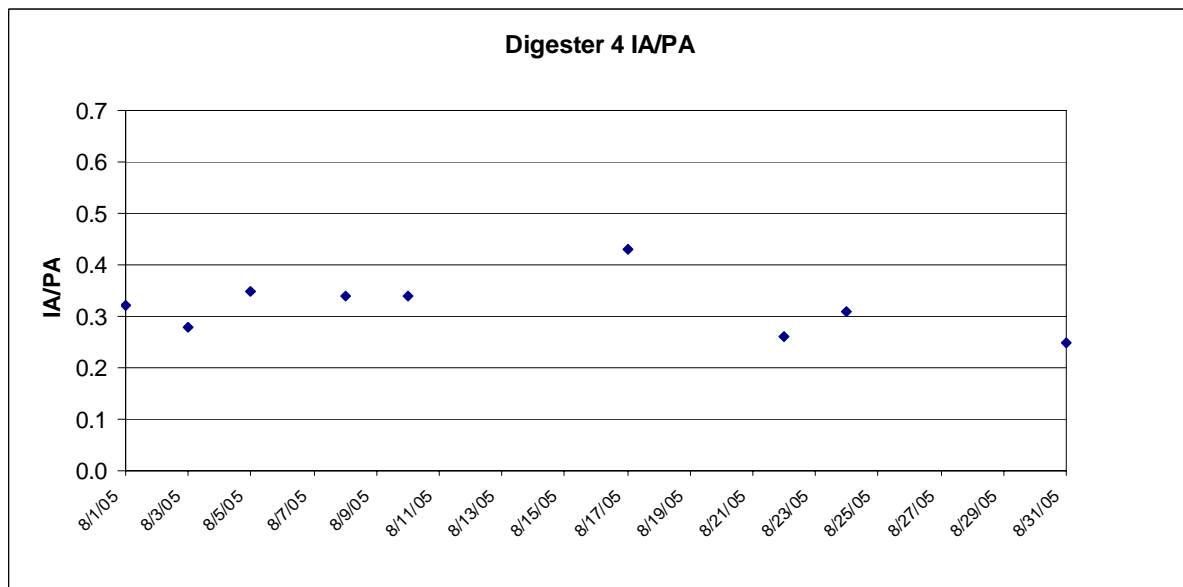


FIGURE 4-7  
Digester 4 IA/PA

### 4.3.3 Digester 4 Temperature

Figure 4-8 shows Digester 4 temperature during the month of August 2005.

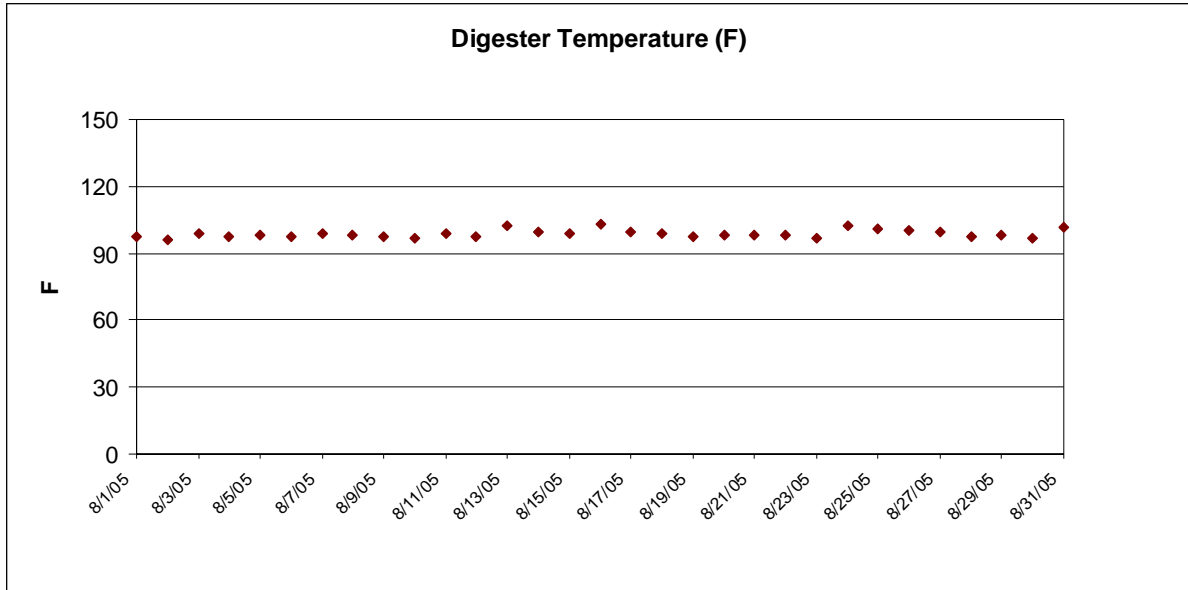


FIGURE 4-8  
Digester 4 Temperature

#### 4.3.4 Digester 4 Biogas Production

Figure 4-9 shows the daily biogas production by Digester 4 during the month of August 2005.

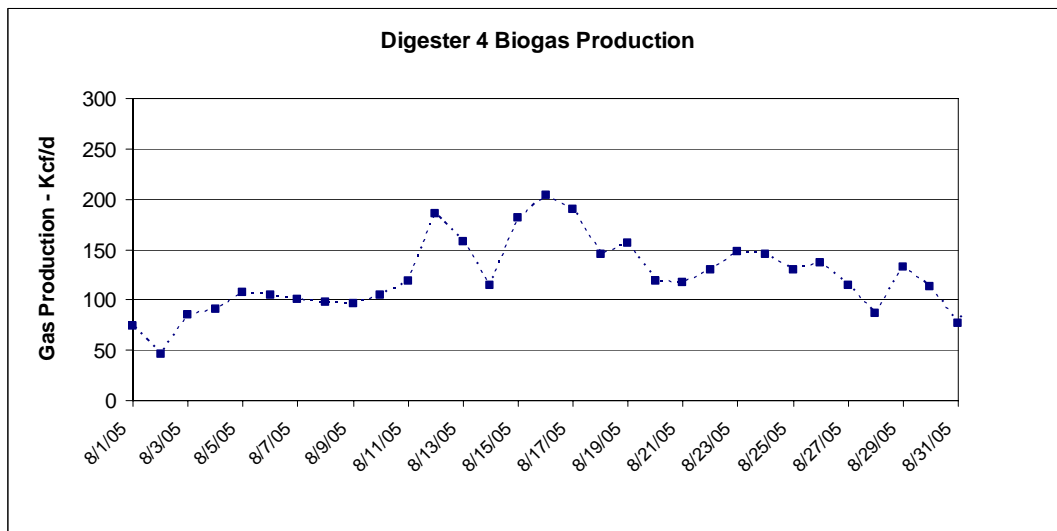


FIGURE 4-9  
Digester 4 Gas Production

#### 4.3.5 VSR

Figure 4-10 shows the percentage of VS reduction (VSR) in Digester 4 during the month of August 2005. VSR was calculated by using both the approximate mass balance and Van

Kleek methods, however, the approximate mass balance was considered more appropriate for this case and the result is presented here.

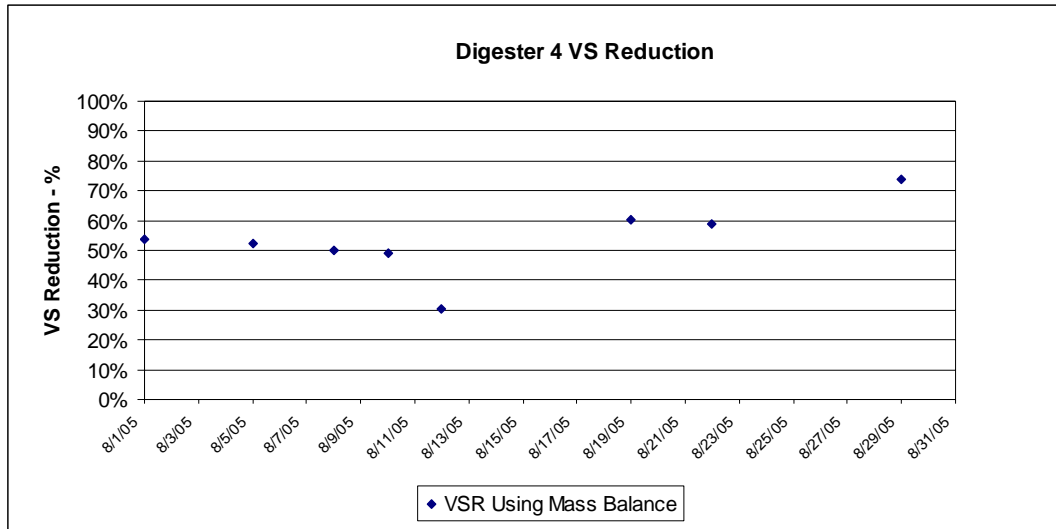


FIGURE 4-10  
Digester 4 VS Reduction

### 4.3.6 Biogas Yield

Biogas yield is calculated as a ratio of biogas production to volatile solids reduction. Figure 4-11 shows the biogas yield obtained by Digester 4 during the month of August 2005.

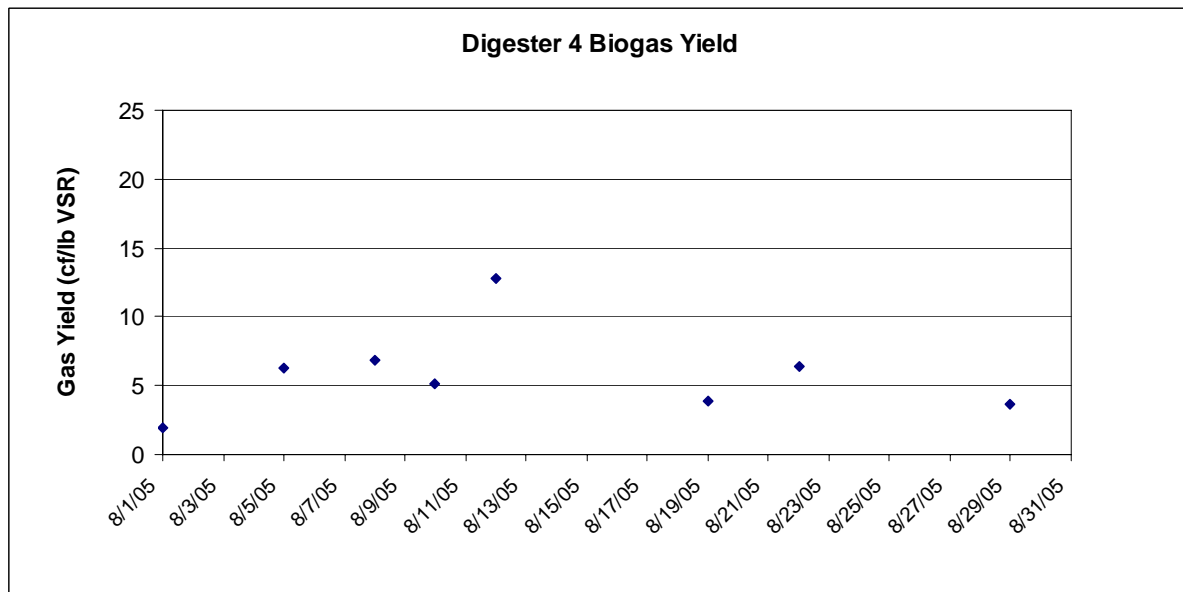


FIGURE 4-11  
Digester 4 Biogas Yield

## 4.4 Monthly Operation and Performance Summary

Tables 4-2 and 4-3 provide the monthly averages for digester operational, performance, and dewatering data. Digester effluent characteristics such as solids concentrations and chemical data (e.g., alkalinity, ammonia and volatile acids) are also included. The flow and solids data were used to determine the mass balance and solids reduction in the digester. The chemical data are measures of digester stability (alkalinity, pH, VAs, ammonia). Ammonia and total Kjeldahl nitrogen (TKN) also have implications for the cost of filtrate treatment, and the fertilizer value of the biosolids product and sulfate concentrations can affect gas quality through H<sub>2</sub>S formation. The digester gas data are also presented, including total gas produced and gas yield. Gas quality parameters include methane content and H<sub>2</sub>S concentrations.

TABLE 4-2  
Monthly Digester 4 Data Averages for August 2005

Parameter	Units	August 2005
<b>Digester Feed Characteristics</b>		
Manure Flow	gpd	39,090
Food Waste Flow <sup>1</sup>	gpd	1,458
Combined Flow	gpd	40,548
Manure TS	lb/d	48,309
Manure VS	lb/d	38,109
Food Waste TS	lb/d	1,738
Food Waste VS	lb/d	1,577
Combined TS	lb/d	50,047
Combined VS	lb/d	39,686
<b>Digester Effluent (i.e. Digested Manure and Food Waste Mixture)</b>		
Digester TS	TS%	7.7
Digester VS	VS%	73
Digested TS	lb/d	26,867
Digested VS	lb/d	19,661
VSR	lb/d	20,025
VSR	%	50.5
pH	SU	7.5
Alkalinity	mg/L	9,173
VA	mg/L	683
VA:Alk (IA/PA)	-	0.32
Total Organic Carbon	mg/L	NA
COD	mg/L	NA
NH <sub>4</sub> -N	mg/L	1,210
TKN	mg/L	3,470

TABLE 4-2  
Monthly Digester 4 Data Averages for August 2005

Parameter	Units	August 2005
Phosphate-P	mg/L	NA
Dissolved Sulfide	mg/L	NA
Total Sulfide	mg/L	NA
Total Sulfur	mg/L	NA
Total Sulfate	mg/L	NA
Proximate Analysis <sup>2</sup>		NA
<b>Digester Gas</b>		
Gas	K cf/d	123
Gas Production	cf/lb VS in	4.3
Gas Yield <sup>3</sup>	cf/lb VSR	5.8
CH <sub>4</sub>	%	54
CO <sub>2</sub>	%	35
H <sub>2</sub> S	ppm	NA
Volatile Sulfur Compounds	ppb	NA
<b>Digester Operations</b>		
Digester Temperature	<sup>0</sup> F	99
Digester Free Board Level <sup>4</sup>	ft	6.7
Digester Active Vol <sup>5</sup>	gal	826,840
HRT by SWD Vol <sup>5</sup>	days	25
VS Load Rate	lbVS/cf active volume <sup>5</sup>	0.359
Iron Salt Addition	gpd	185

<sup>1</sup> Average food waste flow is the monthly average that includes the days without food waste delivery.

<sup>2</sup> Proximate Analysis.

<sup>3</sup> Gas Yield/Biogas Yield based on 15-day running averages for VS in, VS out, and Gas Production. This would be a different value if a different running average period was used.

<sup>4</sup> Digester Free Board Level is the actual operational level measured. Digester 4 sidewall depth (SWD) is 30 feet.

<sup>5</sup> Digester's active volume (110,533 cf or 826,844 gal) was calculated based on digester SWD (30 feet) and with cone volume.

NA = Not Available or Not Applicable.

TABLE 4-3  
Monthly Averages of Dewatering and Recycle Streams Data for Manure at Digester 4 for August 2005

	Unit	August 2005
<b>Feed to Dewatering</b>		
pH	-	7.5
Alkalinity	mg/L	9,173
Temperature	°F	99
Flow	kgal/d	41
TS %	%	7.7
VS %	%	73
VA by IA/PA method	mg/L	683
NH <sub>4</sub> -N	mg/L	1,210
COD	mg/L	NA
Magnesium	mg/L	NA
Ortho-phosphorus	mg/L	NA
Dissolved Sulfide	mg/L	NA
Total Sulfide	mg/L	NA
<b>Dewatered Cake</b>		
TS %	%	29
Polymer usage	lb/ton	9.6
<b>Filtrate</b>		
pH	-	NA
Alkalinity	mg/L	NA
Flow	kgal/d	27
TDS	mg/L	6,780
TSS	mg/L	2,539
Dissolved Sulfide	mg/L	NA
NH <sub>4</sub> -N	mg/L	980
COD	mg/L	8,060
Magnesium	mg/L	NA
Ortho-phosphorus	mg/L	NA

NA = Not Available or Not Applicable.



# Biosolids and Food Waste Co-Digestion

## 5.1 Existing Biosolids Processing Trains at RP-1

RP-1 has six digesters for wastewater biosolids treatment. The solids from the primary clarifiers, or primary sludge, are thickened in a gravity thickener and the solids from the secondary clarifier, or waste activated sludge (WAS), are thickened with dissolved air flotation (DAF). The thickened primary sludge (TPS) and thickened WAS (TWAS) are then digested in a three-phase anaerobic digestion process: mesophilic acid phase digestion, followed by mesophilic and thermophilic gas phase digestion, then further digestion in an unheated gas phase. As shown in Figure 5-1, Digester 1 was used for the first acid phase, feeding Digester 2 (thermophilic), Digester 6 (mesophilic), and Digester 7 (thermophilic) as the second phase gas digesters. Digester 2 fed Digester 3 as the unheated gas digester. Digesters 6 and 7 fed Digester 5. Digester 5 was offline during the month of August for cleaning.

The digested biosolids are then dewatered by belt filter presses and hauled to the Agency's co-composting plant in Chino, operated by Synagro. Filtrate from the belt presses is sent to the non-reclaimable waste (NRW) line operated by the Los Angeles County Sanitation District. The digester gas is used in three Waukesha spark ignition lean burn engines and eight microturbines to generate electricity, and occasionally is used in two hot water boilers.

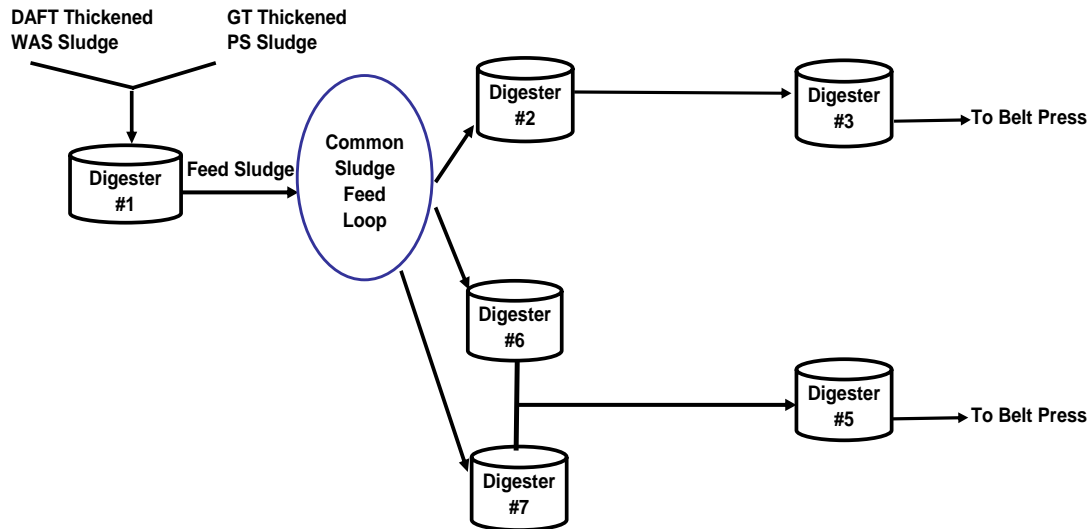


FIGURE 5-1  
RP-1 Current Biosolids Digester Configuration

## 5.2 Biosolids and Food Waste Co-Digestion at RP-1

Beginning in early April 2005, the RP-1 plant initiated a co-digestion project. Food wastes are trucked to the plant on a daily basis and fed to DAFT 3, then to Digester 1, and on to the biosolids digestion trains. This section provides operational and performance data for the biosolids and food waste co-digestion obtained during the month of August 2005. The main focus is on digesters 2 and 6, based on the co-digestion test plan, because these two digesters are operated at the thermophilic and mesophilic temperatures, respectively.

## 5.3 Digesters 2 and 6 Operational Parameters

Digester operational parameters, including feed characteristics, such as flow and solids concentrations to each digester, VS loading rate, and hydraulic retention time, are presented in Figures 5-2 through 5-5. Digester operational parameters affect digester performance; thus it is necessary to monitor these parameters in relation to digester performance.

### 5.3.1 Feed Biosolids and Food Waste

Figure 5-2 present the daily flow rate to Digester 2 (top) and Digester 6 (bottom). The flow represents the combined flow of the biosolids and food waste transferred to these digesters from the acid digester, Digester 1.

Figure 5-3 shows the feed TS concentration and VS content to Digesters 2 and 6 (i.e., Digester 1 effluent).

Table 5-1 shows the monthly feed characteristics averages for Digesters 2 and 6 for August 2005.

### 5.3.2 Solids Loading Rate (SLR)

Figure 5-4 shows the solids loading rate in Digesters 2 and 6.

### 5.3.3 Hydraulic Retention Time (HRT)

Hydraulic retention times for both Digesters 2 and 6 are shown in Figure 5-5.

## 5.4 Digesters 2 and 6 Performance


Digester stability indication parameters (pH and IA/PA) and digester performance parameters (biogas production, VSR, and biogas yield) are presented in Figures 5-6 through 5-11. The monthly averages of these data, along with digester feed, digested biosolids, and food waste mixture characteristics are discussed in Section 5.5.

### 5.4.1 Digester pH

The pH of digesters 2 and 6 is shown in Figure 5-6.

### 5.4.2 Digester IA/PA

Digesters 2 and 6 IA/PA is presented in Figure 5-7.

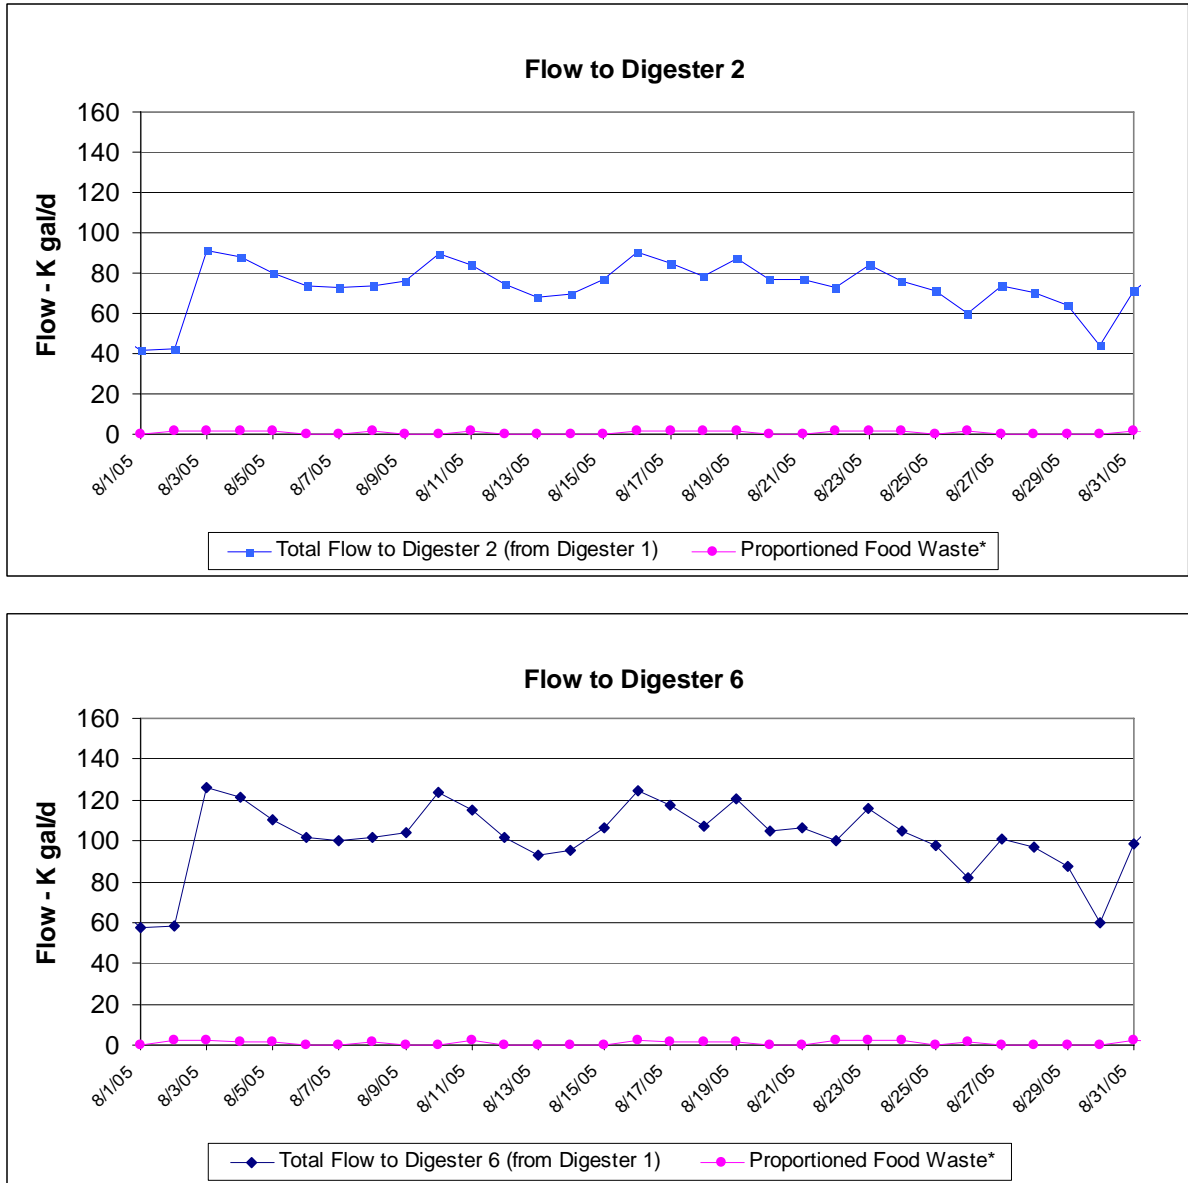

**FIGURE 5-2**  
Biosolids and Food Waste Flow to Digesters 2 and 6

\* The food wastes flow to digesters 2 and 6 was the proportioned amount based on the total food waste fed to DAFT3 then Digester 1 for food waste and biosolids co-digestion test. This proportioned amount is included in the total flow fed to the digester as shown in the figures.

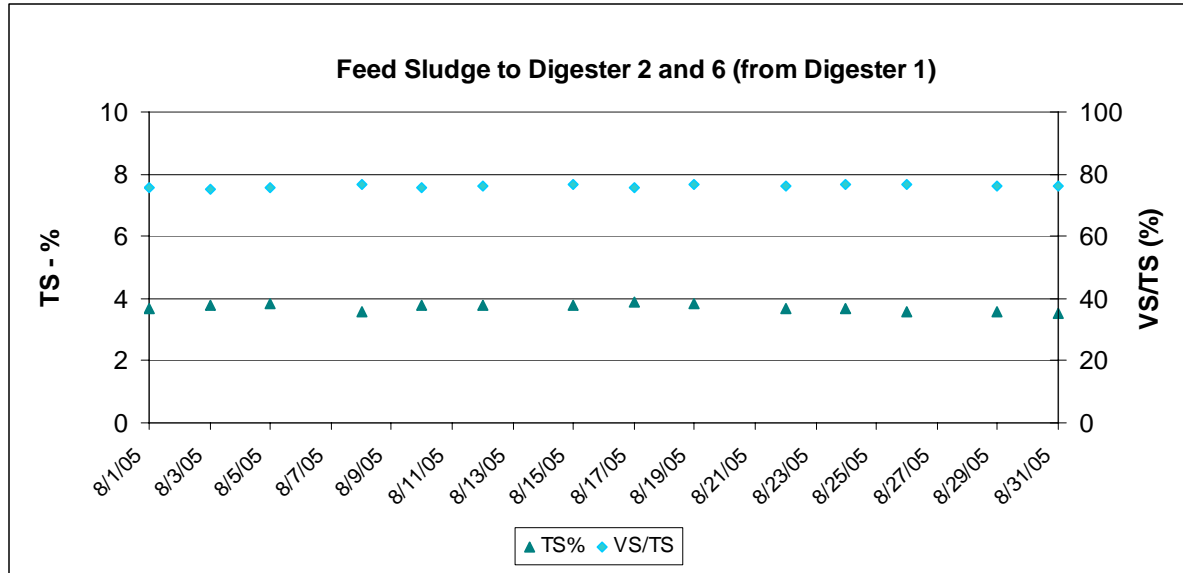


FIGURE 5-3  
TS Concentration and VS Content of Digesters 2 and 6 Feed Sludge (Digester 1 Effluent)

Parameter	Units	Biosolids and Food Waste Mixture Fed to Digesters 2 and 6 (from Digester 1)
TS	%	3.7
VS	%	76
pH		5.4
Alkalinity	mg/L	2,647
Temperature	°F	101
Volatile acids, mg/L	mg/L	4,874
Total Organic Carbon	mg/L	NA
COD	mg/L	NA
NH <sub>4</sub> -N	mg/L	520
TKN	mg/L	2,260
Proximate Analysis		NA

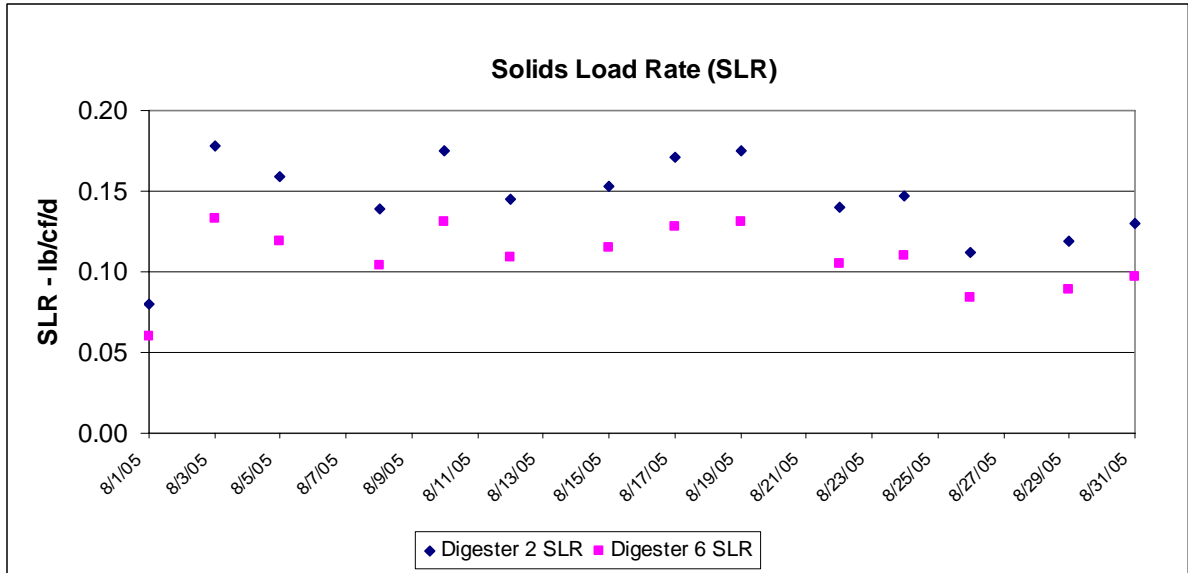


FIGURE 5-4  
Digesters 2 and 6 Volatile Solids Loading Rate

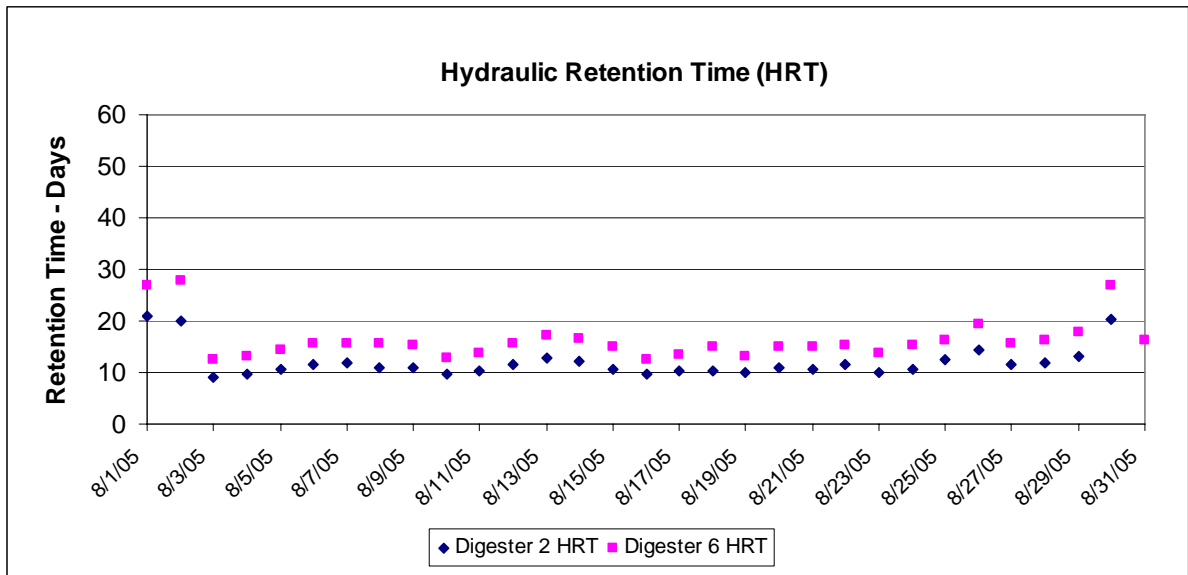


FIGURE 5-5  
Digesters 2 and 6 Hydraulic Retention Times

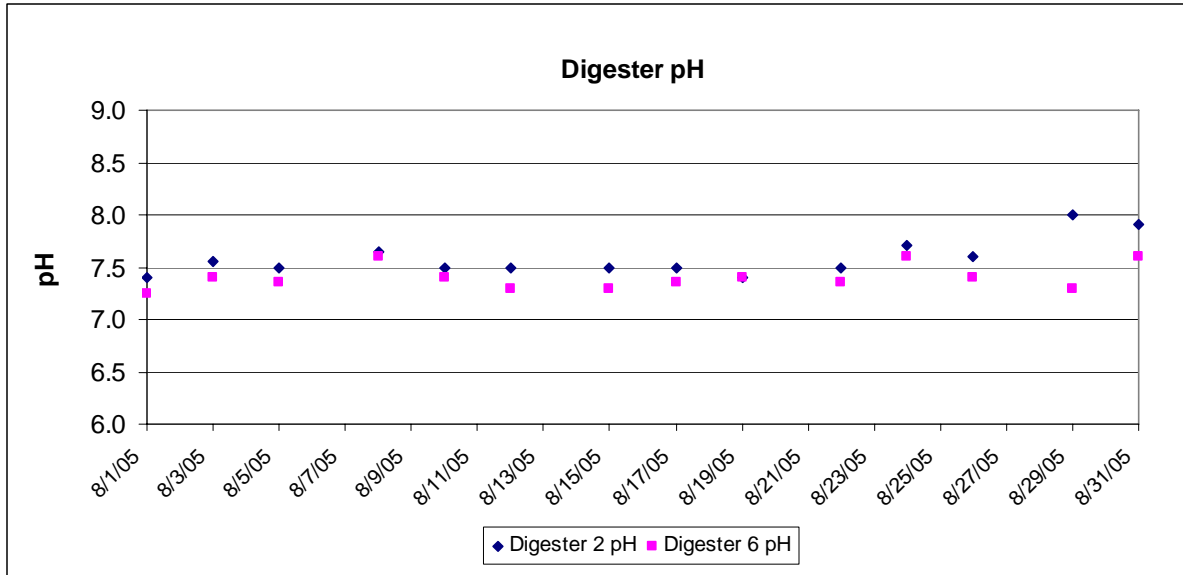


FIGURE 5-6  
Digester pH

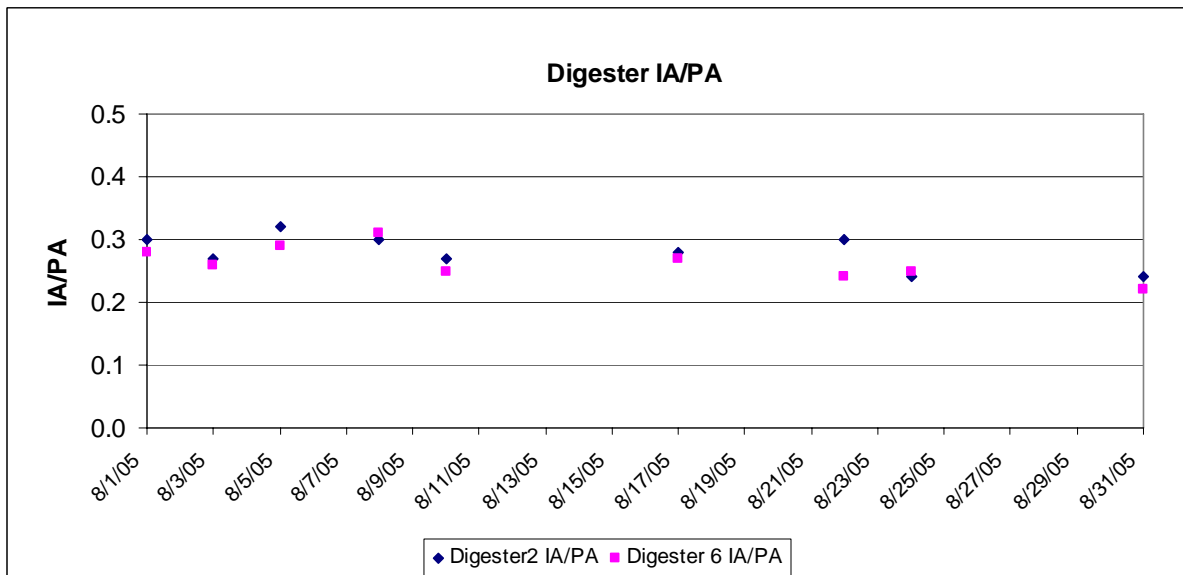


FIGURE 5-7  
Digester IA/PA

### 5.4.3 Digester Temperature

Digesters 2 and 6 temperature is presented in Figure 5-8.

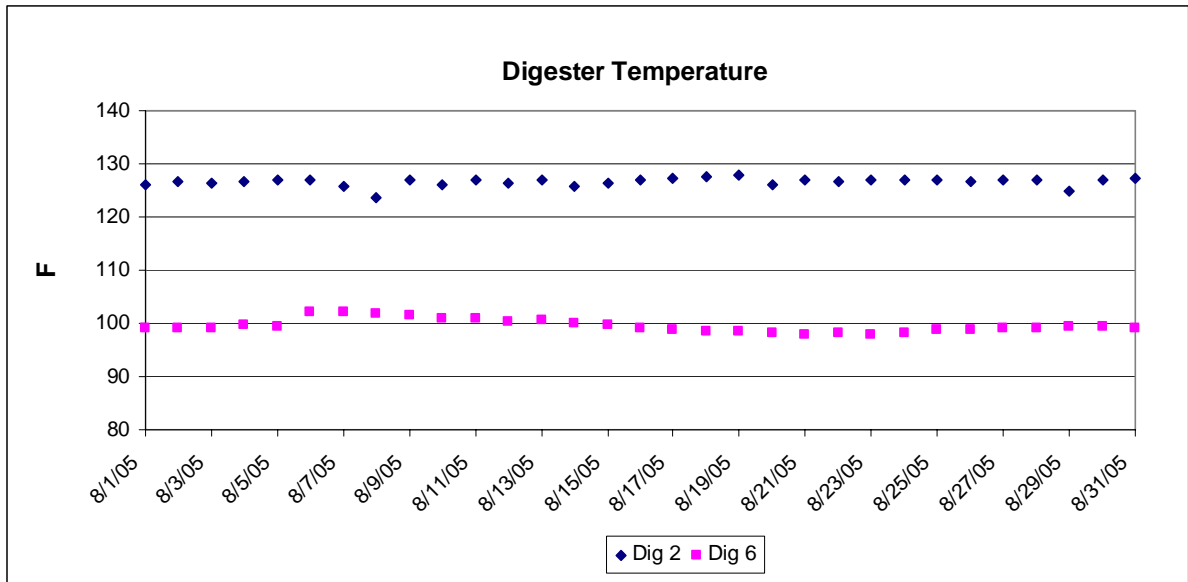


FIGURE 5-8  
Digester Temperature

### 5.4.4 Biogas Production

Figure 5-9 shows the daily gas production by digesters 2 and 6.

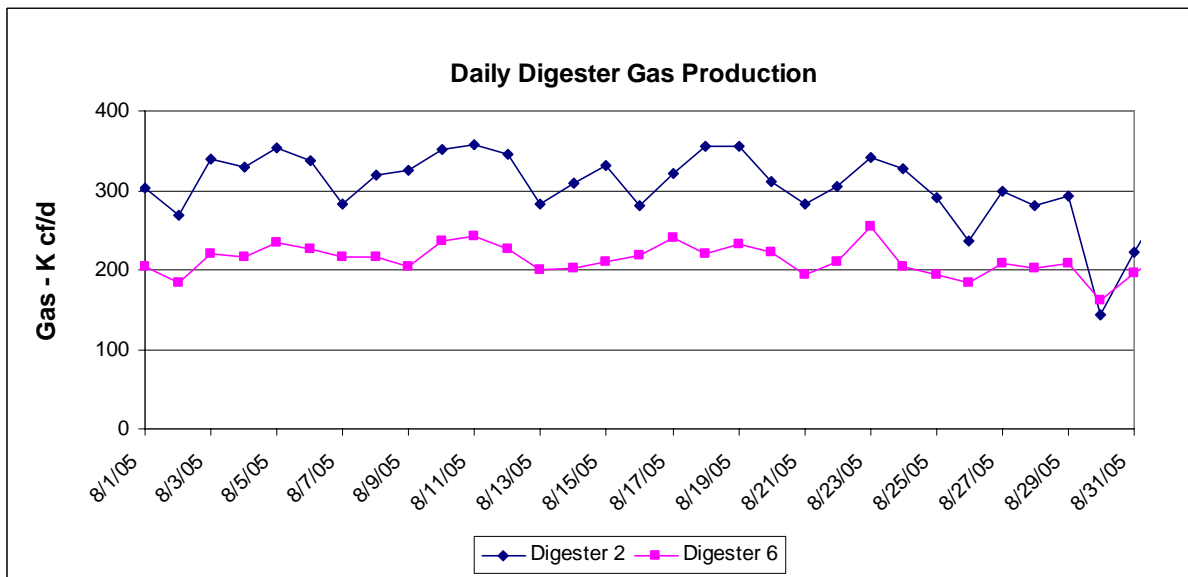


FIGURE 5-9  
Digester Gas Production

### 5.4.5 VSR

Figure 5-10 shows VS reduction in Digesters 2 and 6. Approximate mass balance method was used for calculating the VSR.

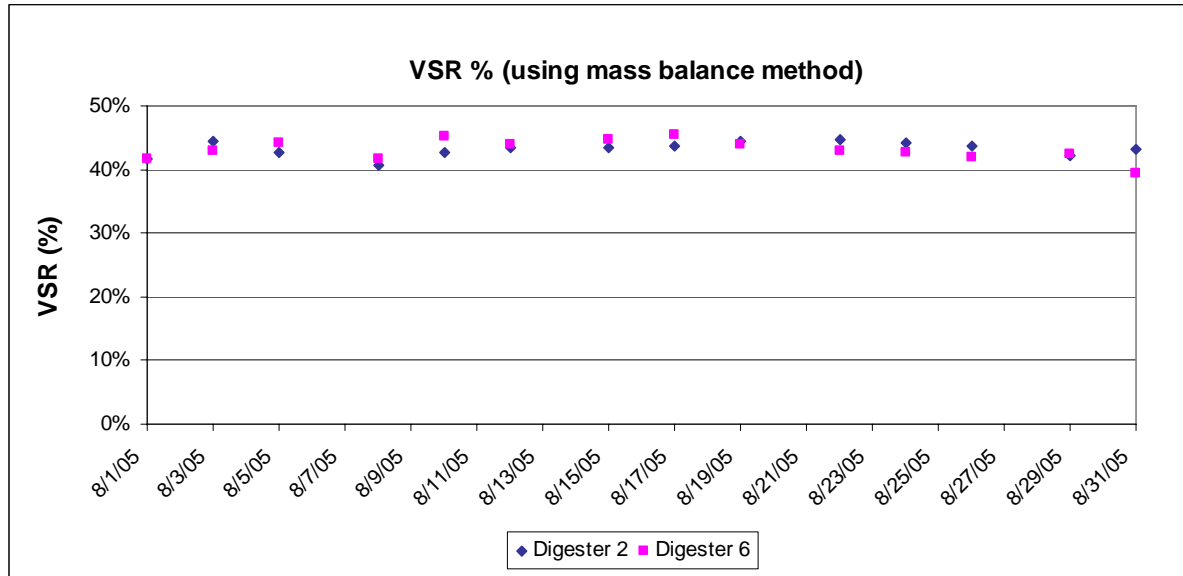


FIGURE 5-10  
VS Reduction

### 5.4.6 Biogas Yield

Figure 5-11 shows the biogas yield by Digesters 2 and 6.

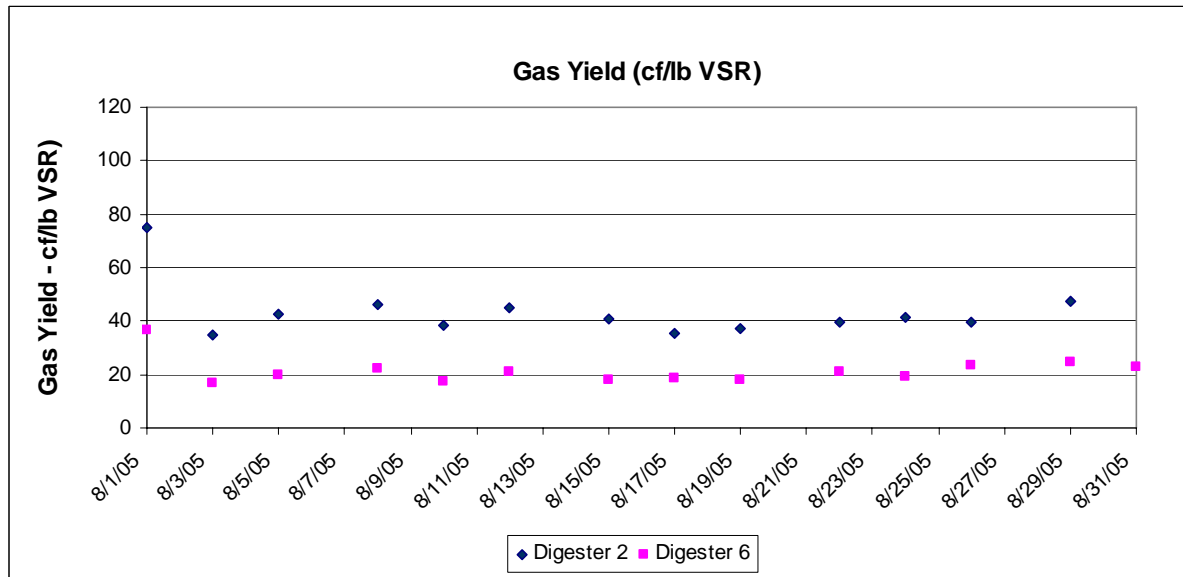


FIGURE 5-11  
Biogas Yield

## 5.5 Monthly Operation and Performance Summary

Tables 5-2 and 5-3 provide the monthly average data for digester operation, performance, and dewatering. Digester effluent characteristics, such as solids concentrations and chemical data (e.g., alkalinity, ammonia and volatile acids), are also included. The flow and solids data were used to determine the mass balance and solids reduction in the digester. The chemical data are measures of digester stability (alkalinity, pH, VA, ammonia). Ammonia and TKN also have implications for the cost of filtrate treatment. In addition, the fertilizer value of the biosolids product and sulfate concentrations can affect gas quality through formation of H<sub>2</sub>S. The digester gas data are also presented, including total gas produced and gas yield. Gas quality parameters include methane content and H<sub>2</sub>S concentrations. The methane content was calculated based on carbon dioxide content measured in the gas.

TABLE 5-2  
Monthly Averages of Digesters 2 and 6 Operational and Performance Data for August 2005

Parameter	Units	Digester 2	Digester 6
<b>Digester Feed Characteristics</b>			
Mixture of Combined Biosolids and Food Waste Flow from Digester 1	gpd	73,702	101,339
Proportioned Food Waste Flow <sup>1</sup>	gpd	785	916
Combined TS	lb/d	22,966	31,577
Combined VS	lb/d	17,488	24,043
<b>Digested Sludge</b>			
Dig Sludge TS	TS%	2.5	2.5
Dig Sludge VS	VS%	65	64
Dig Sludge TS	lb/d	15,199	21,138
Dig Sludge VS	lb/d	9,902	13,618
VSR	lb/d	7,586	10,425
VSR	%	43	43
pH	SU	7.6	7.4
Alkalinity	mg/L	4,617	4,411
VA	mg/L	2,149	540
VA:Alk (IA/PA)	-	0.28	0.26
Total Organic Carbon	mg/L	NA	NA
COD	mg/L	NA	NA
NH <sub>4</sub> -N	mg/L	1,060	980
TKN	mg/L	2,400	2,230
Phosphate-P	mg/L	NA	NA
Dissolved Sulfide	mg/L	NA	NA
Total Sulfide	mg/L	NA	NA
Total Sulfur	mg/L	NA	NA
Total Sulfate	mg/L	NA	NA
Proximate Analysis		NA	NA

TABLE 5-2  
Monthly Averages of Digesters 2 and 6 Operational and Performance Data for August 2005

Parameter	Units	Digester 2	Digester 6
<b>Digester Gas</b>			
Gas	kcf/d	306	213
Gas Yield <sup>2</sup>	cf/lb VSR	46.8	23
CH <sub>4</sub>	%	63	63
CO <sub>2</sub>	%	36	36
H <sub>2</sub> S	ppm	NA	NA
Volatile Sulfur Compounds	ppb	NA	NA
<b>Digester Operations</b>			
Digester Temperature	°F	127	100
Digester Free Board Level <sup>3</sup>	ft	2.3	2.0
Digester active vol <sup>4</sup>	gal	916,270	1,680,630
HRT by SWD vol	days	12	16
VS load rate	lbVS/cf active volume <sup>4</sup>	0.143	0.107

<sup>1</sup> Food waste was added to Digester 1 from DAFT3. The flow here is the proportioned amount based on the flow distribution ratio from Digester 1 to Digesters 2, 6 and 7. Average number includes zeros.

<sup>2</sup> Gas Yield/Biogas Yield based on 15-day running averages for VS in, VS out, and Gas Production. This would be a different value if a different running average period was used.

<sup>3</sup> Digester Free Board Level is the actual operational level measured. Digesters 2 and 6 sidewall depths (SWD) are 30 feet.

<sup>4</sup> Digester's active volume was calculated based on digester SWD (30 feet) and with cone volume.

NA = Not Available or Not Applicable.

TABLE 5-3  
Monthly Averages of Dewatering and Recycle Streams Data for Digesters 2 and 6 for August 2005

	Unit	Digester 2	Digester 6
<b>Feed to Dewatering</b>			
pH	-	7.6	7.4
Alkalinity	mg/L	4,617	4,411
Temperature	°F	127	100
TS %	%	2.5	2.5
VS %	% of TS	65	64
VA by IA/PA method	mg/L	2,149	540
NH <sub>4</sub> -N	mg/L	1,060	980
COD	mg/L	NA	NA
Magnesium	mg/L	NA	NA
Ortho-phosphorus	mg/L	NA	NA
Dissolved Sulfide	mg/L	NA	NA

**TABLE 5-3**  
 Monthly Averages of Dewatering and Recycle Streams Data for Digesters 2 and 6 for August 2005

	<b>Unit</b>	<b>Digester 2</b>	<b>Digester 6</b>
Total Sulfide	mg/L	NA	NA
<b>Dewatered Cake</b>			
TS %	%		18 <sup>1</sup>
Polymer usage	lb/ton		14 <sup>1</sup>
<b>Filtrate</b>			
pH	-		NA <sup>1</sup>
Alkalinity	mg/L		NA <sup>1</sup>
TDS	mg/L		1,588 <sup>1</sup>
TSS	mg/L		206 <sup>1</sup>
Dissolved Sulfide	mg/L		NA <sup>1</sup>
NH <sub>4</sub> -N	mg/L		798 <sup>1</sup>
COD	mg/L		802 <sup>1</sup>
Magnesium	mg/L		NA <sup>1</sup>
Ortho-phosphorus	mg/L		NA <sup>1</sup>

<sup>1</sup> The numbers are tracked for the combined filtrate from dewatering of the biosolids digesters currently.

NA = Not Available or Not Applicable.